


FD Series Replaceable Core Filter For Liquid Line

- It is made use of solid dry filter core FJ-48A. It can absorb the water and acidic material. It can filtrate the impurity in the filter system.
- It is very easy to change the filter core according to the high-accuracy flange, modular filter core shelf and installing the spring.
- There is the nickel plating on the inside wall of the shell in order to prevent the rust against the water.
- The connection size is steeliness of 2-5/8" and 3-1/8", other sizes are copper.
- It is installed with the access hole for measured the pressure drop and charging function.
- Max. admissible operating pressure: 31 bar.
- Applicative refrigerants: R134a, R404A, R407A, R407C, R507, R22.

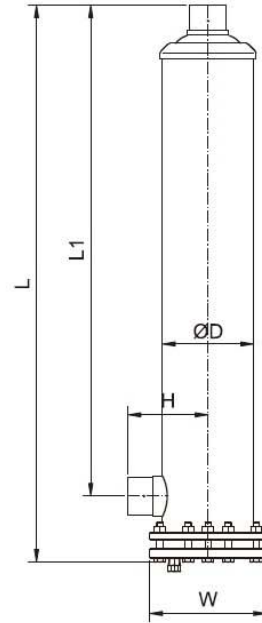

Model	Joint Size (Inch)	Core Quantity (Piece)	ØD (mm)	H (mm)	L (mm)	L1 (mm)	W (mm)	Volume (l)
FD-485-T	5/8"	1	114	83	231	160	146	1.6
FD-487-T	7/8"	1	114	79	228	154	146	1.6
FD-489-T	1-1/8"	1	114	82	231	154	146	1.6
FD-4811-T	1-3/8"	1	114	93	347	161	146	1.6
FD-4813-T	1-5/8"	1	114	93	377	157	146	1.6
FD-967-T	7/8"	2	114	79	355	299	146	2.9
FD-969-T	1-1/8"	2	114	82	376	299	146	2.9
FD-9611-T	1-3/8"	2	114	93	387	306	146	2.9
FD-9613-T	1-5/8"	2	114	93	387	302	146	2.9
FD-9617-T	2-1/8"	2	114	106	399	309	146	2.9
FD-1449-T	1-1/8"	3	114	82	521	444	146	4.2
FD-14411-T	1-3/8"	3	114	93	532	451	146	4.2
FD-14413-T	1-5/8"	3	114	93	532	447	146	4.2
FD-14417-T	2-1/8"	3	114	106	544	454	146	4.2
FD-14421-T	2-5/8"	3	114	119	544	451	146	4.2
FD-19211-T	1-3/8"	4	114	93	677	596	146	5.5
FD-19213-T	1-5/8"	4	114	93	677	592	146	5.5
FD-19217-T	2-1/8"	4	114	106	689	599	146	5.5
FD-19221-T	2-5/8"	4	114	119	689	596	146	5.5
FD-19225-T	3-1/8"	4	114	121	699	597	146	5.5